

FINEplus

Enhanced Flow and Performance



Semi-Compliant Coronary Balloon Catheter


- Line up from 1.0mm balloon
- Optimized flexible 0.016 tip
- Advanced crossability and deliverability

FINE PLUS SC BALLOON CATHETER

ORDERING INFORMATION

Balloon Diameter	LENGTH							
	5 mm	8 mm	10 mm	12 mm	15 mm	20 mm	25 mm	30 mm
1.0 mm	JSSCB-10005	JSSCB-10008	JSSCB-10010	JSSCB-10012	JSSCB-10015	JSSCB-10020	JSSCB-10025	JSSCB-10030
1.25 mm	JSSCB-12505	JSSCB-12508	JSSCB-12510	JSSCB-12512	JSSCB-12515	JSSCB-12520	JSSCB-12525	JSSCB-12530
1.5 mm	JSSCB-15005	JSSCB-15008	JSSCB-15010	JSSCB-15012	JSSCB-15015	JSSCB-15020	JSSCB-15025	JSSCB-15030
1.75 mm	JSSCB-17505	JSSCB-17508	JSSCB-17510	JSSCB-17512	JSSCB-17515	JSSCB-17520	JSSCB-17525	JSSCB-17530
2.0 mm	JSSCB-20005	JSSCB-20008	JSSCB-20010	JSSCB-20012	JSSCB-20015	JSSCB-20020	JSSCB-20025	JSSCB-20030
2.25 mm	JSSCB-22505	JSSCB-22508	JSSCB-22510	JSSCB-22512	JSSCB-22515	JSSCB-22520	JSSCB-22525	JSSCB-22530
2.5 mm	JSSCB-25005	JSSCB-25008	JSSCB-25010	JSSCB-25012	JSSCB-25015	JSSCB-25020	JSSCB-25025	JSSCB-25030
2.75 mm	JSSCB-27505	JSSCB-27508	JSSCB-27510	JSSCB-27512	JSSCB-27515	JSSCB-27520	JSSCB-27525	JSSCB-27530
3.0 mm	JSSCB-30005	JSSCB-30008	JSSCB-30010	JSSCB-30012	JSSCB-30015	JSSCB-30020	JSSCB-30025	JSSCB-30030
3.25 mm	JSSCB-32505	JSSCB-32508	JSSCB-32510	JSSCB-32512	JSSCB-32515	JSSCB-32520	JSSCB-32525	JSSCB-32530
3.5 mm	JSSCB-35005	JSSCB-35008	JSSCB-35010	JSSCB-35012	JSSCB-35015	JSSCB-35020	JSSCB-35025	JSSCB-35030
3.75 mm	JSSCB-37505	JSSCB-37508	JSSCB-37510	JSSCB-37512	JSSCB-37515	JSSCB-37520	JSSCB-37525	JSSCB-37530
4.0 mm	JSSCB-40005	JSSCB-40008	JSSCB-40010	JSSCB-40012	JSSCB-40015	JSSCB-40020	JSSCB-40025	JSSCB-40030

TECH INFORMATION

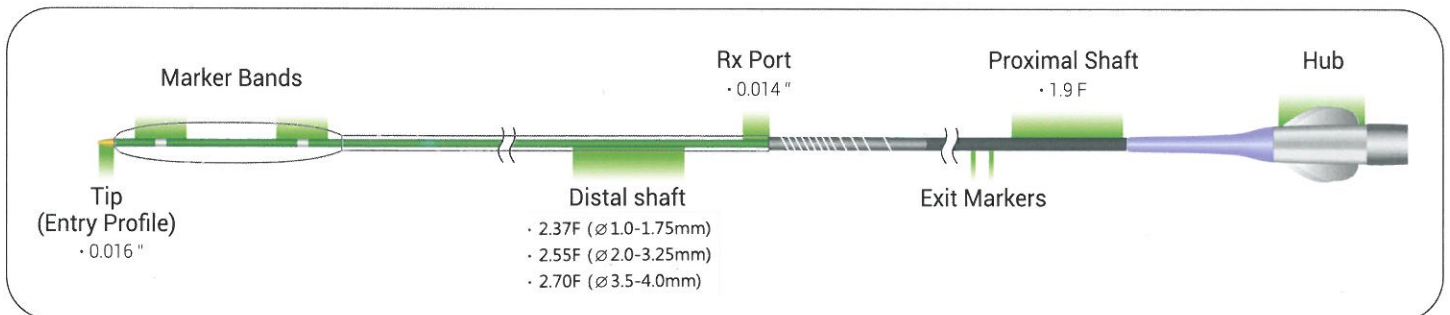

Compliance	Nominal Pressure	Rated Burst Pressure	Average Burst Pressure
Semi-compliance	6 atm	14 atm	20 atm

Tip Length	Marker Bands	Guiding Catheter Compatibility	Coating
1.5 mm (ø 1.0-1.75 mm)	2 markers	5F compatible	Hydrophilic from tip to adjacent guidewire port
2.0 mm (ø 2.0-3.25 mm)	(Note: 1 marker for ø 1.0-1.75 mm)	6F compatible for kissing	Silicone coating for guidewire lumen
2.5 mm (ø 3.5-4.0 mm)			